

KBLI1270 12.8V 7.0Ah



Longer Cycle Life: Offers up to 20 times longer cycle life and five times longer float/ calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.

Lighter Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.


Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

Wider Storage Temperature Range: -20 °C-60 °C.

Superior Safety: Prismatic Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.



Physical Dimension-mm

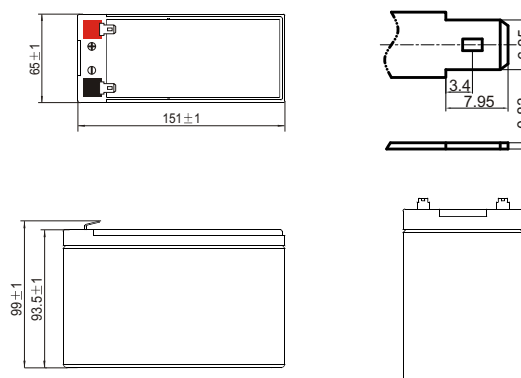

Performance Characteristics

Nominal Voltage	12.8V
Nominal Capacity	7.0Ah
Energy	89.6Wh
Cycle Life	>2000 cycles @ 1C 100%DOD
Efficiency of charge	100% @0.5C
Efficiency of Discharge	96-99% @1C
Charge Voltage	14.6
Charge Mode	0.2C to 14.6V, then 14.6V,charge current to 0.02C (CC/CV)
Charge Current	4.0A
Max. Charge Current	7.0A
Max. Discharge Current	7.0A
Discharge Cut-off Voltage	10.0V
Operating Humidity	0-95% RH (No condensing)
Operating Temperature range	Charge: 0 ~+50°C Discharge: -20 ~+55°C
IP Class	IP65
Plastic Case	ABS
Approx. Dimensions	151mm*65mm*99mm (5.95in.*2.56in.*3.90in.)
Approx. Weight	0.93kg (2.05lbs)
Terminal	F1
Protection	Over voltage, Over discharge, Over Temperature, Short circuit
Certification	UN38.3, CE
Parallels Support	Yes, Max, 2 Sets
Series Support	Yes, Max, 4 Sets

Applications


Wheelchairs and scooters
Solar / wind energy storage
Back-up power for small UPS
Golf trolleys & buggies
Electric bikes
Tools

(Note) The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.


KBLI12200 12.8V 7.0Ah




Different Rate Discharge Curve (25°C)

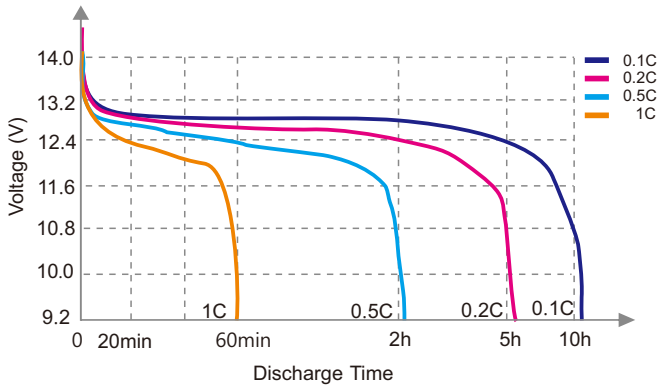


Different Temperature Discharge Curve (0.5C)

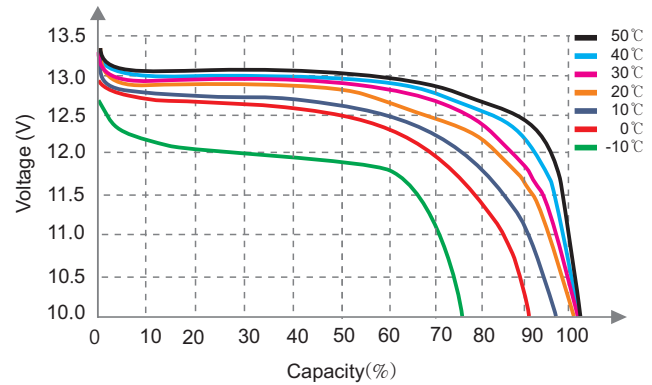


State of charge Curve (0.5°C, 25°C)

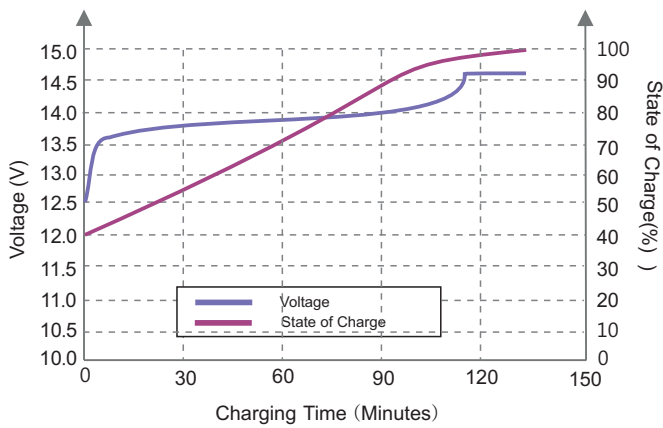


Charging Characteristics (0.5°C, 25°C)

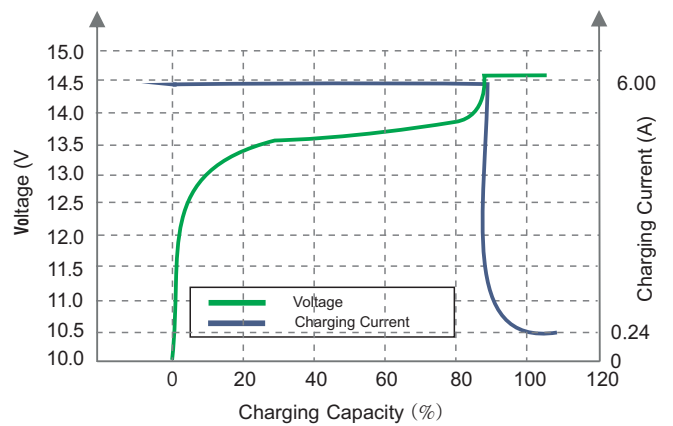

Different DOD Discharge Cycle Life Curve (1C)

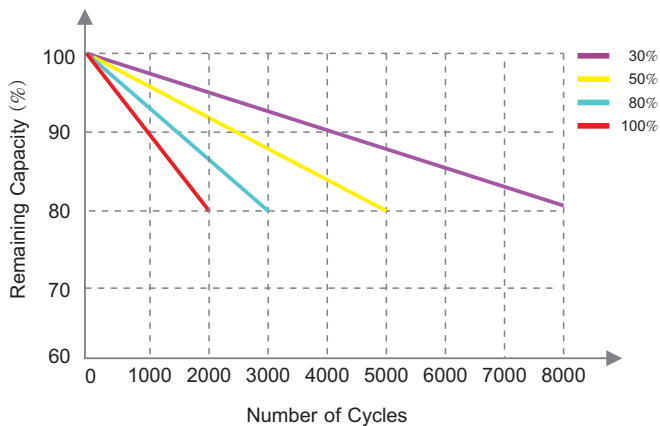

Different Temperature Self Discharge Curve

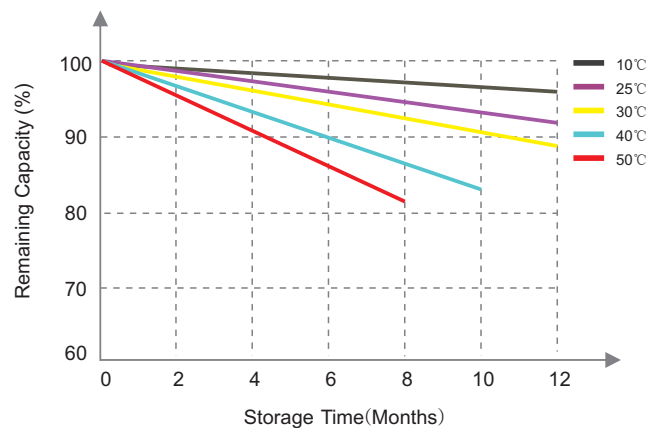

IMPORTANT NOTE: The specifications presented herein are subject to revision without notice.

Contacto
energy@tempelgroup.com
www.tempelgroup.com

Tempel Group en el mundo
 BARCELONA · MADRID · VALENCIA · BILBAO · SEVILLA · LISBOA · PORTO · BUENOS AIRES · LIMA
 SANTIAGO DE CHILE · BOGOTÁ · SÃO PAULO · CIUDAD DE MÉXICO · CIUDAD DE PANAMÁ · MONTEVIDEO · QUITO

