

KBLI12200 12.8V 20Ah



Longer Cycle Life: Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.

Lighter Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.

Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

Wider Storage Temperature Range: -20 °C -60 °C.


Superior Safety: Prismatic Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.



Performance Characteristics

Nominal Voltage	12.8V
Nominal Capacity	20Ah
Energy	256Wh
Cycle Life	>2000 cycles @ 80%DOD
Efficiency of charge	100% @0.5C
Efficiency of Discharge	96-99% @1C
Charge Voltage	14.6V
Charge Mode	0.2C to 14.6V, then 14.6V,charge current to 0.02C (CC/CV)
Charge Current	10A
Max. Charge Current	20A
Max. Discharge Current	20A
Discharge Cut-off Voltage	10V
Operating Humidity	0-95% RH (No condensing)
Operating Temperature range	Charge: 0 ~ +50°C; Discharge: -20 ~+55°C
IP Class	IP65
Plastic Case	ABS
Approx. Dimensions	181.5mm*77mm*167.5mm (7.15in.*3.03in.*6.59in.)
Approx. Weight	2.60kg (5.73lbs)
Terminal	M5
Communication Interface	/
Protection	Over charge, Over discharge, Over temperature, Short circuit
Certification	UN38.3, CE
Parallels Support	Yes, Max, 2 Sets
Series Support	Yes, Max, 4 Sets

Physical Dimension-mm

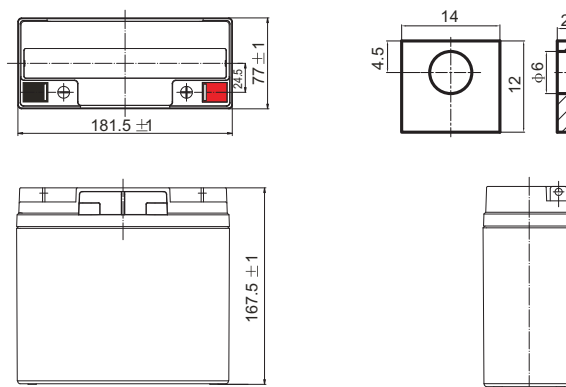


Applications


- Wheelchairs and scooters
- Solar / wind energy storage
- Back-up power for small
- UPS Golf trolleys & buggies
- Electric bikes
- Tools

(Note) The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.


Different Ratio Discharge Curve (25°C)

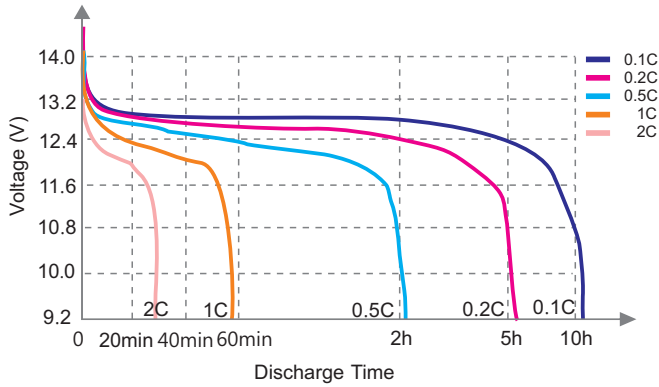


Different Temperature Discharge Curve (0.5°C)

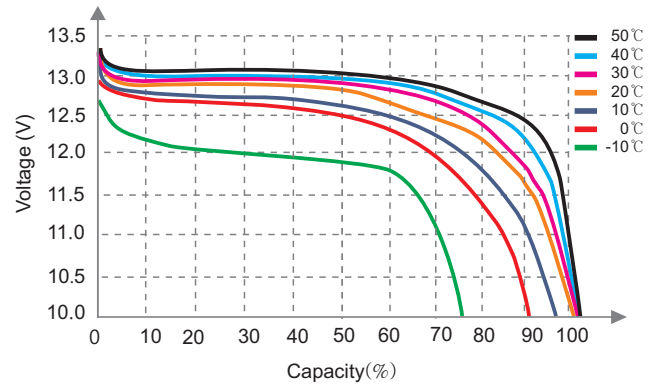


State of charge Curve (0.5°C, 25°C)

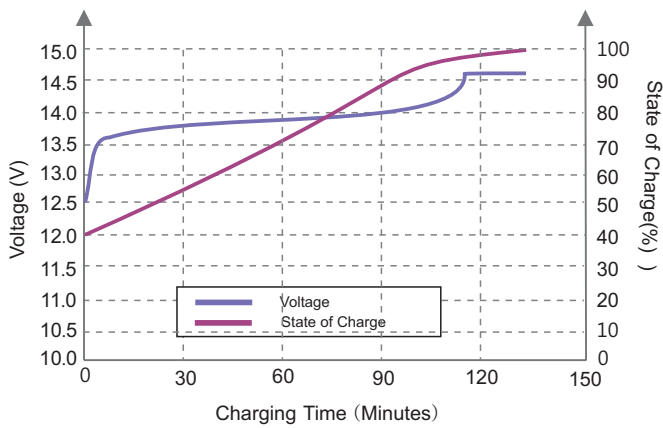


Charging Characteristics (0.5°C, 25°C)

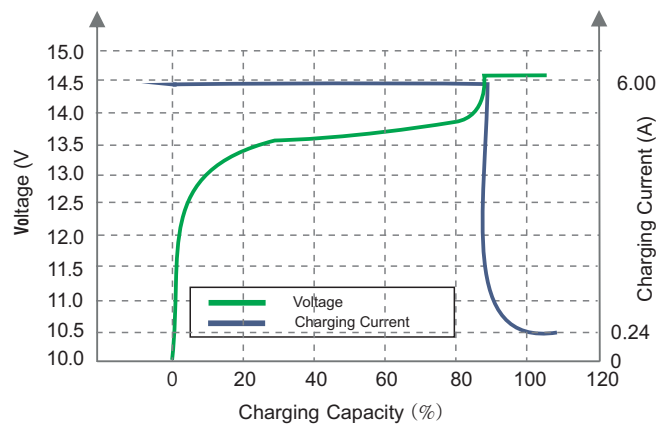

Different DOD Discharge Cycle Life Curve (1C)

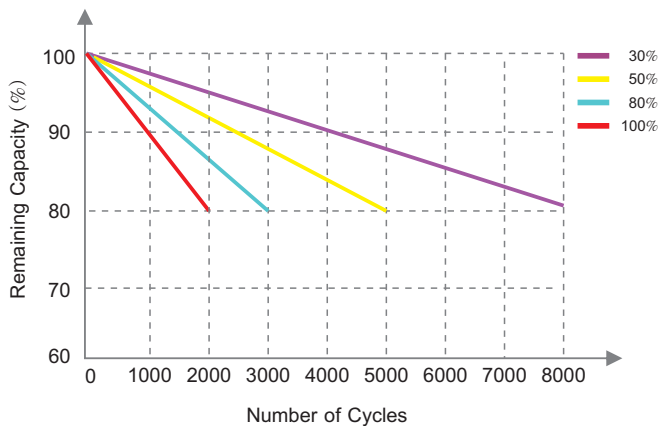

Different Temperature Self Discharge Curve

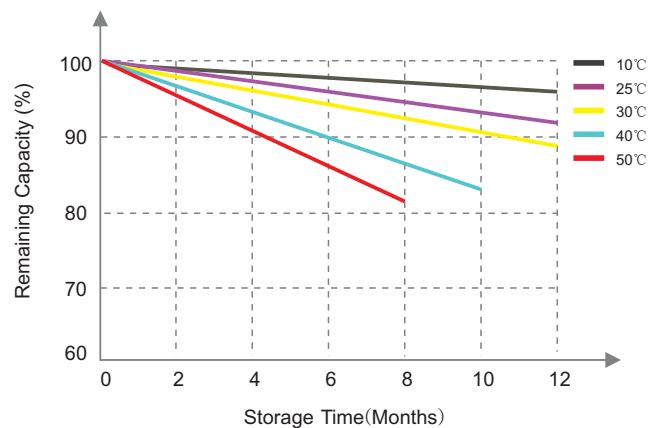

IMPORTANT NOTE: The specifications presented herein are subject to revision without notice.

