

GL67CK3_1 220 Ah

According to EN 50342



AGM series
HEAVY-DUTY VEHICLES



Electrical specification

Voltage:	12V
Capacity C20:	220 Ah
Cold cranking current:	1400 A [EN]
Cold cranking current:	840 A [DIN]

Mechanical specification

Dimensional group:	C
ETN reference:	720 901 140
DIN reference:	72001
Dimensions^A in mm (LxWxH):	514x274x242
Cell Layout:	3
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B0
	Colour	Grey

Lid	Material	Polypropylene
	Cover design	Kamina
	Colour	Black

Vent caps	Material	Polypropylene
	Type	Kamina
	Colour	Black

Handles	Material	Polypropylene
	Position	Sides - on container
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W5	C2	V3/V4	E3

Weight^B

Battery weight in kg:	47.00
Acid weight in kg:	14.70
Total battery weight in kg:	61.70

Layout

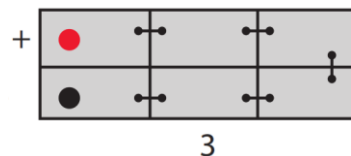

Hold-down



Separator

Type	AGM
-------------	------------

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.