

MONBAT Premium SMF A67L2X0_1 66 Ah

According to EN 50342



Premium

SEALED MAINTENANCE FREE



Electrical specification

Voltage:	12V
Capacity:	66 Ah
Cold cranking current:	660 A [EN]
Cold cranking current:	400 A [DIN]

Mechanical specification

Dimensional group:	L2
ETN reference:	566 019 066 SMF
DIN reference:	-
Dimensions (LxWxH):	242x175x190
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V2	E2


Weight

Battery weight:	11.30
Acid weight:	4.60
Total battery weight:	15.90

Layout

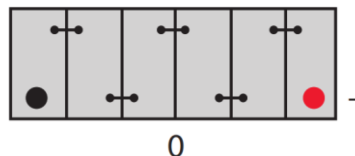

Hold-down



Separator

Type	PE
-------------	-----------