


Range: **ASIA**
 Type name: **CB45.1J**

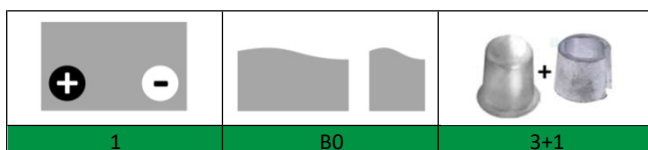

PERFORMANCES*		CONFIGURATION	
Voltage:	12 V	Size:	238x129x224 mm (B24)
Capacity:	45 Ah (20h)	Polarity:	1
C. Cranking (EN):	330 A	Terminal:	3+1 (thin with adapter)
Vibration (EN):	V1	Holddown:	B0
Duration (EN):	E2	Ventilation:	Central
Self-Discharge:	12 months	Maintenance:	Not required (MF)
(from the date of production, at 25°C)			

*According to standard EN 50342

INTERNAL CONSTRUCTION		COMPONENTS	
Tecnology:	Punched, with regular surface	Box/Recipiente:	PP/black
Alloy:	Calcium	Lid:	Flat double, PP/black
Separator:	PE envelope	Plugs:	Termal sealing, PP/black
Total Weight:	11,6 kg	Handles:	On lid, PP/black
Acid:	Inside the battery		
Origin:	Europe		

RECOMMENDATIONS	
Storage:	Check voltage every 6 months. Avoid exposure to sub-zero temperatures.
Recharge:	Use automatic chargers with constant voltage.
Installation:	Not applicable to Start-Stop vehicles.