

Series	FS	Warranty	1 Year
Volts	12	BCI	Grp 31
Cells	6	Plates/Cell	11
Terminal Type	DT		
Included Hardware	Stainless Steel K-Lock Nut		
Size & Thread	5/16"-18		

Charge

Charge Voltage Range	14.7-15 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	670
Marine Crank Amps (MCA) 32°F / 0°C	906
Reserve Capacity (RC @ 25A)	216 Minutes
Reserve Capacity (RC @ 75A)	64 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	173 AH	1.73 A
@ 20 Hour Rate	130 AH	6.5 A
@ 10 Hour Rate	111 AH	11.05 A
@ 5 Hour Rate	98 AH	19.5 A


Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications

	Weight	29.5 kg	65 lbs
	Length	33 cm	13"
	Width	17.1 cm	6.75"
	Height Inc. Term.	24.1 cm	9.5"
Electrolyte Reserve	38 mm	1.5"	
Container	Polypropylene		
Cover	Polypropylene		
Handles	Top Mount Plastic		

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Cycle Life vs. Depth of Discharge

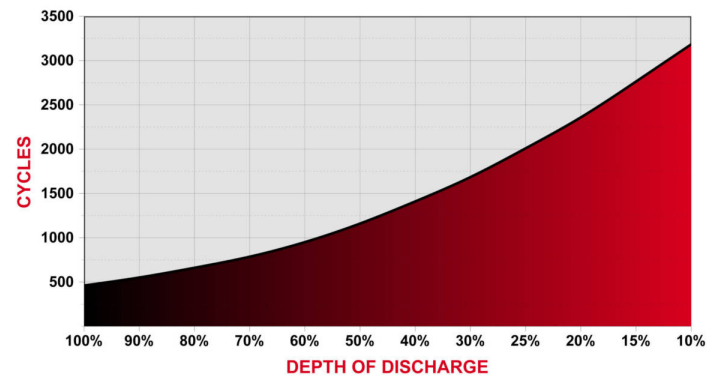

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

Detailed Illustration

