


# TECHNICAL DATA SHEET

DGY12-135EV-M6

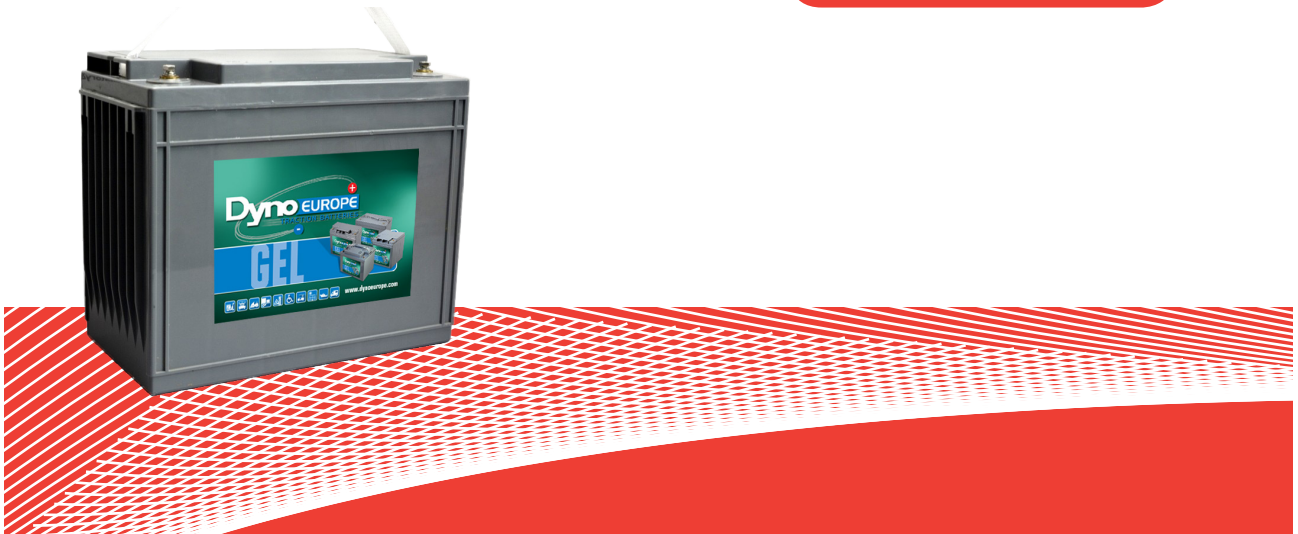


## General Features

- › Nanosilica colloidal electrolyte and high tin positive plate alloy design to enhance battery performance
- › Relatively rich electrolyte, high temperature and low temperature performance is superior
- › Long cycle life, excellent deep cycle discharge ability
- › Excellent charge acceptance ability
- › Precision sealing technology
- › Long life



Dimension: 340(L) × 173(W) × 286(H) × 286(TH) Unit: mm

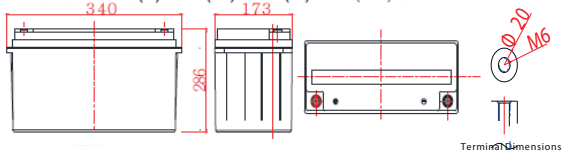

## Applications

- › Electric vehicle
- › Electric wheelchair
- › Electric scooter
- › Electric play car for children
- › Garbage truck
- › Patrol car

## Specification

Nominal Voltage	12V
Nominal Capacity	135Ah
Design life	5 years
Terminal	M6
Approx. Weight	Approx 45.0kg (99.3lbs)
Container Material	ABS
Rated Capacity	<b>166,8Ah</b> 20Hour Rate (8.34 A to 10.5V) <b>157Ah</b> 10Hour Rate (15.7 A to 10.5V) <b>148,5Ah</b> 5Hour Rate (29.7 A to 10.5V)
Operating Temperature	Discharge: -20 ~50°C (-4 ~ 122°F) Charge: -20 ~50°C (-4 ~ 122°F) Storage: -20 ~50°C (-4 ~ 122°F)
Charge current:	Max. 27.0A
Charge Method	Float Charge: 13.7 - 13.9 V, recom. 13.8 V (-18mV/°C) (25 °C) Cycle charge: 14.28 - 14.4 V, recom. 14.4 V (-30mV/°C)
Self discharge	3% of capacity declined per month at 25°C

# TECHNICAL DATA SHEET

**DGY12-135EV-M6**

## Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	5M	15M	30M	1h	2h	3h	5h	8h	10h	20h
1.60V	574	308	188	110	62.9	46.6	30.6	19.6	16.1	8.47
1.65V	556	299	184	109	62.6	46.1	30.3	19.5	16.0	8.42
1.70V	534	293	181	108	62.1	45.5	30.0	19.3	15.8	8.38
1.75V	491	283	180	107	61.1	45.0	29.7	19.2	15.7	8.34
1.80V	440	264	172	104	60.0	44.6	28.9	19.0	15.5	8.30
1.85V	393	235	157	96.2	57.0	42.0	27.5	18.2	15.0	8.16

## Constant Power Discharge Characteristics Unit: W/cell(25°C, 77°F)

F.V/Time	5M	15M	30M	1h	2h	3h	5h	8h	10h	20h
1.60V	962	543	339	207	119	88.6	58.1	38.2	31.0	16.8
1.65V	925	534	336	206	119	87.5	57.8	37.9	30.7	16.7
1.70V	921	527	336	204	118	87.0	57.3	37.7	30.4	16.6
1.75V	858	524	335	203	117	86.5	57.0	37.4	30.1	16.5
1.80V	788	495	327	201	117	86.2	56.3	37.1	29.8	16.4
1.85V	704	443	299	187	112	82.0	53.8	35.8	29.3	16.3

Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.

## Charger recommendations


Type of charger	Zivan	AQHF WP	AQHF24-30FC G2
Matching profile	AGM =BA1+CU2	AMG SLA	AGM

**Max. charging current 2.4Vpc**


# TECHNICAL DATA SHEET

**DGY12-135EV-M6**


## Discharge characteristic

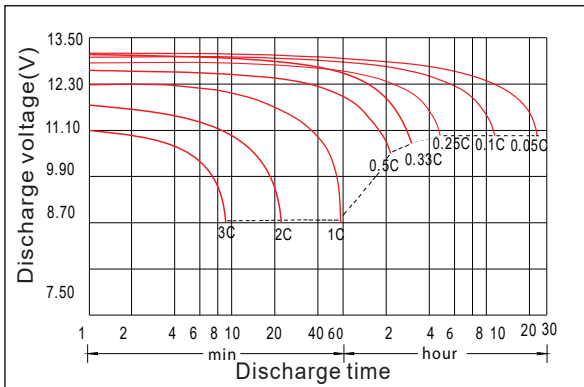


## Charging characteristic

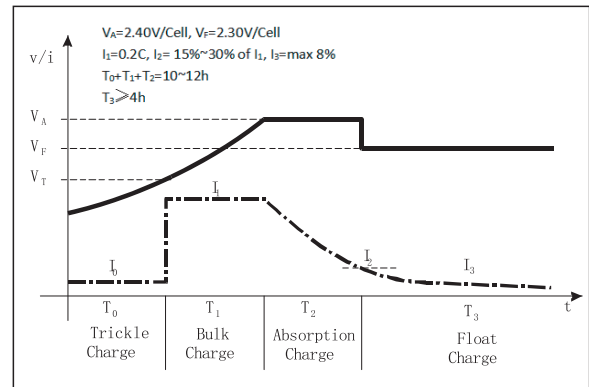


## The effect of temperature on capacity

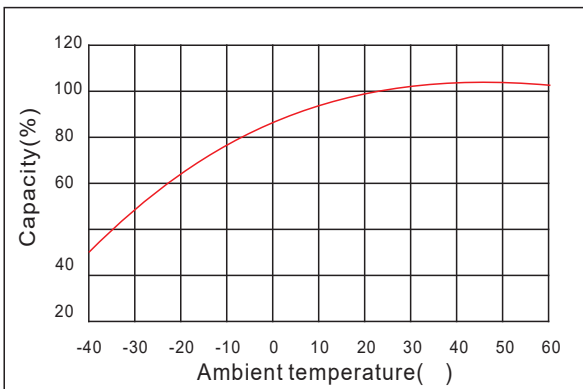

## The effect of discharge depth on cycle life

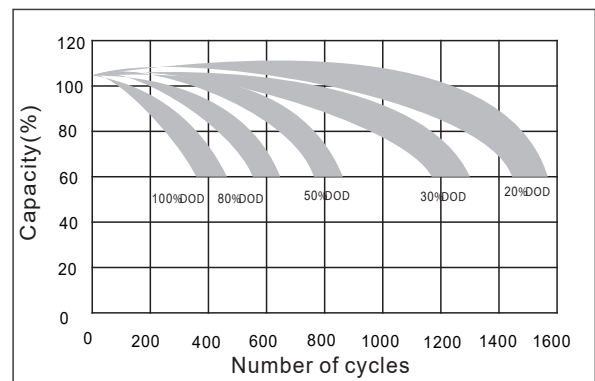

## Curves of self-discharge

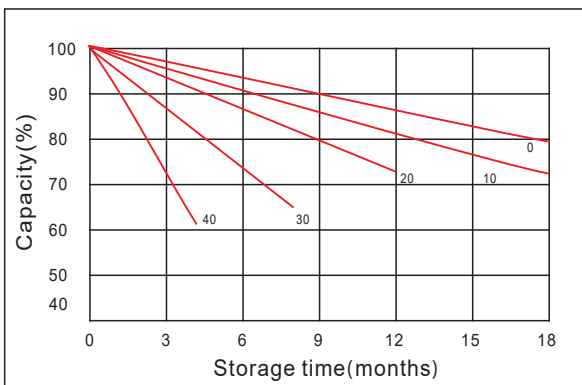

## Curves of open circuit voltage vs. capacity

