

TECHNICAL DATA SHEET

DAB12-26EV



Applications


- › Electric vehicle
- › Electric wheelchair
- › Electric scooter
- › Electric play car for children
- › Garbage truck
- › Patrol car

General Features

- › High Corrosion Resistant Performance: Pb-Ca multi-alloy grid
- › High Energy Density and Power Density
- › Excellent Charge Acceptance Ability
- › Strong High and Low Temperature Performance
- › Optimized Capability of instant High-current Discharging
- › Low self-discharge rate



Dimension: 166(L)×175(W)×125(H)×125(TH) Unit: mm

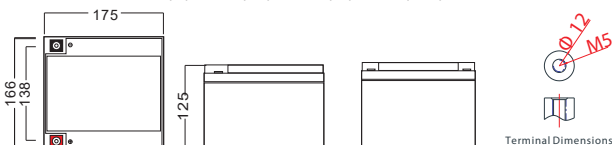

Specification

Nominal Voltage	12V
Nominal Capacity	26.0Ah
Design life	5 years
Terminal	M5
Approx. Weight	Approx 7.70kg (17.0lbs)
Container Material	ABS
Rated Capacity	26.0Ah 20Hour Rate (1.30A to 10.5V)
	24.4Ah 10Hour Rate (2.44 A to 10.5V)
	22.6 Ah 5Hour Rate (4.52 A to 10.5 V)
Internal resistance	Full charged at 25°C: 15.0 mΩ
Max. Discharge Current	390A(5S)
Operating Temperature	Discharge: -20 ~50°C(-4~ 122°F)
	Charge: -20 ~50°C(-4~ 122°F)
	Storage: -20 ~50°C(-4~ 122°F)
Charge current:	Max.5.2A
Charge Method (25 °C)	Float Charge:13.5-13.8V, recom. 13.8V(-18mV/ °C)
	Cycle charge:14.28-14.4V, recom. 14.4V(-30mV/ °C)
Self discharge	3% of capacity declined per month at 25°C

TECHNICAL DATA SHEET

DAB12-26EV

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

FV/Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	103	67.3	50.2	32.9	17.2	9.83	7.18	5.75	4.89	3.22	2.57	1.38
1.65V	102	64.5	46.0	31.2	16.1	9.44	6.97	5.56	4.78	3.17	2.55	1.35
1.70V	83.7	60.6	42.9	30.3	15.6	9.26	6.84	5.28	4.73	3.12	2.50	1.33
1.75V	77.7	57.7	40.0	29.6	15.1	9.02	6.73	5.20	4.52	3.04	2.44	1.30
1.80V	71.5	54.3	37.2	28.6	14.5	8.79	6.37	5.10	4.34	2.96	2.39	1.25

Constant Power Discharge Characteristics Unit: W/cell(25°C, 77°F)

FV/Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	193	121	91.9	55.6	31.5	18.4	13.6	10.9	9.23	6.08	4.99	2.73
1.65V	178	115	86.2	55.2	29.6	17.7	13.2	10.5	9.06	5.99	4.89	2.66
1.70V	163	111	82.3	55.0	28.7	17.4	13.0	10.0	8.80	5.93	4.85	2.63
1.75V	148	108	79.3	54.4	27.9	17.0	12.8	9.9	8.62	5.69	4.74	2.58
1.80V	133	104	75.8	54.0	27.5	16.9	12.4	9.8	8.41	5.50	4.65	2.56


Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.

Charger recommendations


Type of charger	Zivan	AQHF WP	AQHF24-30FC G2
Matching profile	AGM =BA1+CU2	AMG SLA	AGM

Max. charging current 2.4Vpc


Discharge characteristic

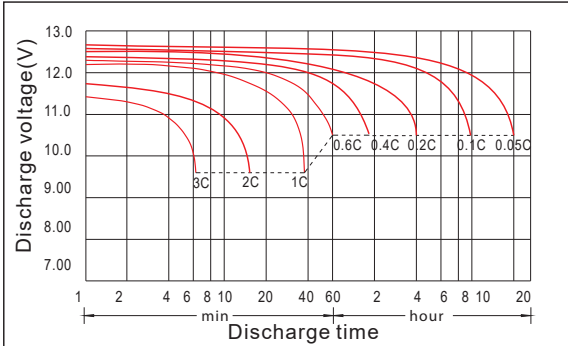


Charging characteristic

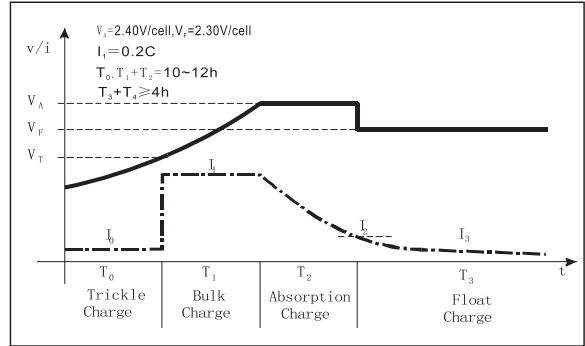


The effect of temperature on capacity

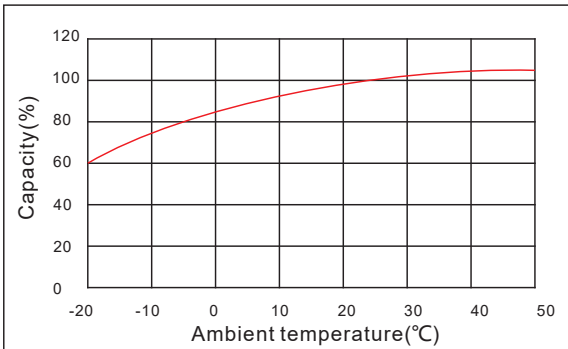

The effect of discharge depth on cycle life

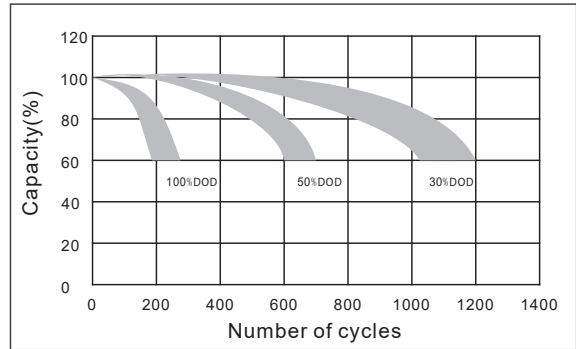

Curves of self-discharge

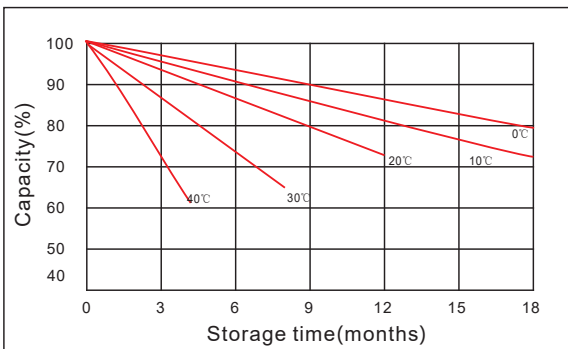

The effect of temperature on float life

