


LSLA2.9-12

Valve Regulated Lead Acid Rechargeable Battery

Specifications

Nominal Voltage	12v
Capacity (20hr)	2.90AH
Capacity (10hr)	2.60AH
Weight	1.05kgs
Container Material	ABS

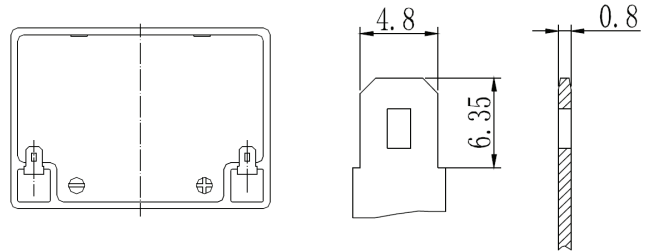


Operating Temperature Range

Charge	-10°C-60°C
Discharge	-20°C-60°C
Storage	-20°C-60°C

Charging Methods at 25°C


Cycle Use	13.80-14.10V
Co-efficient	-30mV/C
Standby Use	13.38-13.62V
Co-efficient	-20mV/C
Internal Resistance	45.0 mΩ
Self Discharge (per month)	3.0% PER MONTH AT 20°C AVERAGE
Max Discharge	43.5A(5s)

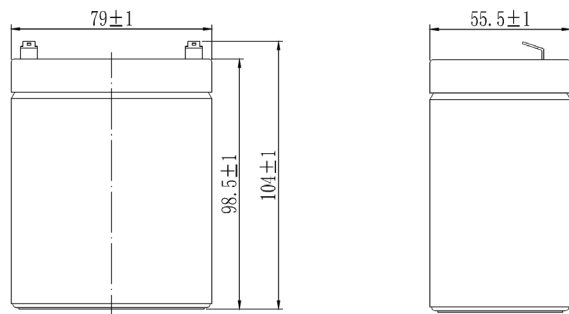


Dimensions

Length	79.0mm
Width	55.5mm
Height	98.5mm
Total Height (inc. Terminal)	104.0mm

Depth of Discharge Characteristics

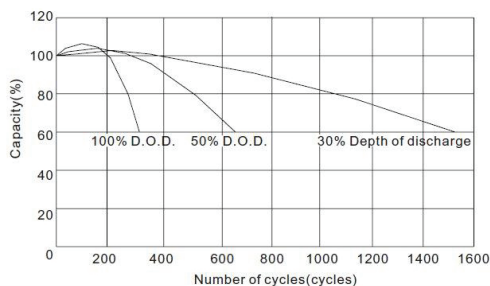

Storage Characteristics

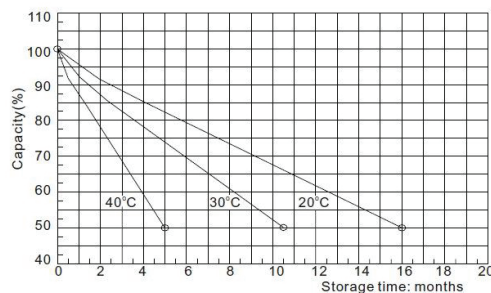

Safety Information

Installation	Can be installed and operated in any orientation except permanently inverted
Handles	Batteries must not be left permanently suspended by their handles (where fitted)
Vent Valves	Each cell is fitted with a low pressure release valve to allow gases to escape then reseal
Gas Release	VRLA batteries release hydrogen gas which can form explosive mixtures in air - do not keep inside a sealed container
Recycling	VRLA batteries must be recycled at the end of their life in accordance with national laws

Transport Information

- Classified as 'Batteries, wet, non-spillable, electric storage'
- UN2800
- Class 8
- Packaging Group III