



NON-SPILLABLE

SLA

TERMINAL

Front



Side



Top



3D



FEATURES

- READY TO USE
- AGM TECHNOLOGY
- WET CHARGED FACTORY ACTIVATED
- BATTERY VRLA (VALVE REGULATED LEAD ACID)
- NON SPILLABLE: EASY TO SHIP
- 100% MAINTENANCE FREE
- MULTI-POSITIONAL FITMENT
- MINIMIZED PLATE SULFATION
- SUITABLE FOR COLD WEATHER
- NO ACID HANDLING
- EASY TO INSTALL
- HIGHER LIFE CYCLE

SPECIFICATION

VOLTAGE

12v

CAPACITY (20h)

6.3Ah

CCA (EN)


130A

CAPACITY (10h)

6.0Ah

DIMENSIONS & WEIGHT

LENGTH	113±2mm
WIDTH	70±2mm
TOTAL HEIGHT	105±2mm
GROSS WEIGHT	2.27kg

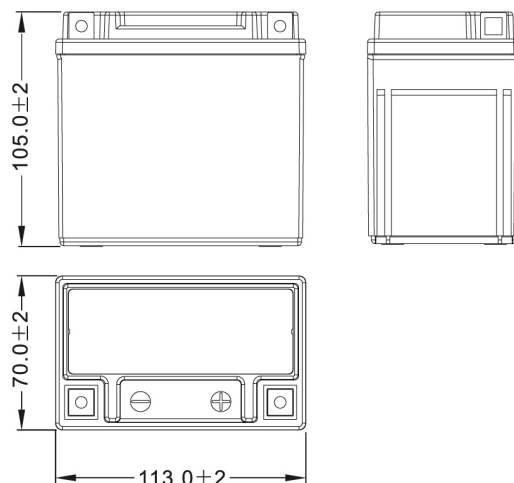

POLARITY



MOUNTING ANGLES

