

## FLOODED DEEP CYCLE BATTERY

## 6 LC GC-DIN



Series	LC	Warranty	1 Year
Volts	6	BCI	GC-DIN
Cells	3	Plates/Cell	17
Terminal Type	Auto Post		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18 x 1-1/2"		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)		
Float Voltage Range	2.25 V/cell @ 25°C (77°F)		
Self-Discharge Rate	5%-10% per month at 25°C (77°F)		

### Capacity

Cold Crank Amps (CCA) 0°F / -17°C	710		
Marine Crank Amps (MCA) 32°F / 0°C	888		
Reserve Capacity (RC @ 25A)	484 Minutes		
Reserve Capacity (RC @ 75A)	127 Minutes		

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 5 Hour Rate	194 Ah	38.8 A
@ 10 Hour Rate	216 Ah	21.6 A
@ 20 Hour Rate	245 Ah	12.25 A

Amphère hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications




Weight	32.0 kg	70.5 lbs
Length	244 mm	9.61"
Width	191 mm	7.52"
Height Inc. Term.	269 mm	10.5"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	44 mm	1.75"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Built-in	

### Cycle Life vs. Depth of Discharge

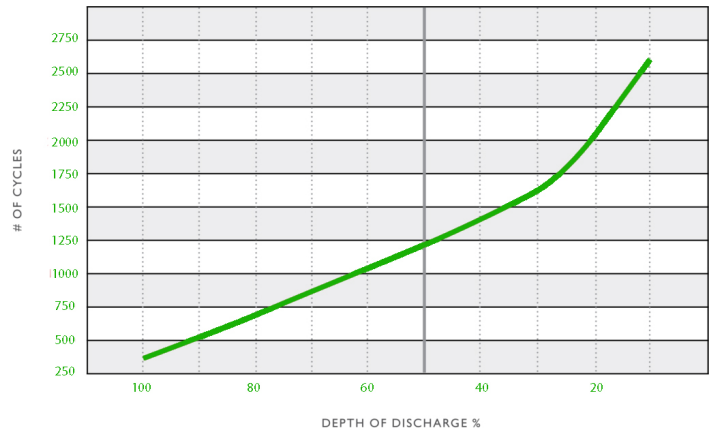

### Voltage vs. Depth of Discharge

