



### LIVEN LVDC Series

LVDC series are manufacturing with Lead Carbon active material to perform in partial state of charge (PSoC) applications and double separator configuration. LVDC series are AGM-GEL technology Valve Regulated Lead Acid (VRLA) suitable for Deep Cycle applications. Electrolyte + GEL for longer cycle life. Maintenance-Free Sealed Lead Acid Battery.


### Applications:

- Wheelchairs
- Golf trolleys
- Electric sweepers
- Floor machines
- Electric vehicles
- Lawn mowers
- Portable power
- Railway and Marine systems
- Medical equipments
- Renewable energies

### Dimensions:

Length	229±1.5mm (9.02in)
Width	138±1.5mm (5.43in)
Height	210±1.5mm (8.27in)
Total Height	216.5±1.5mm (8.52in)

### Technical Drawings:

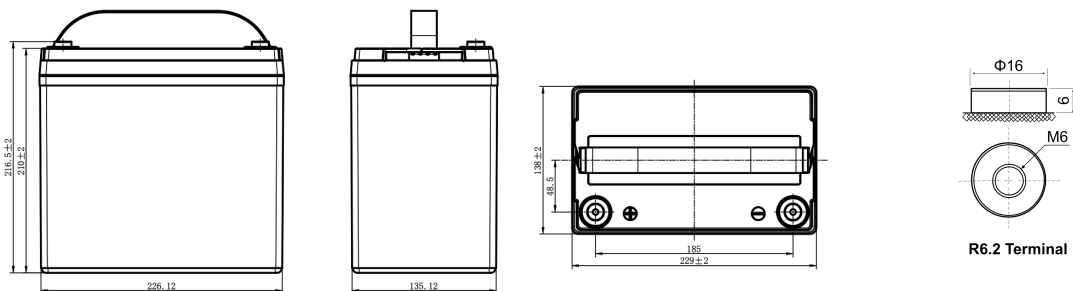


### Constant Current Discharge (CC, Unit: A) at 25°C (77°F)


Voltage (V)	Capacity (Ah)			
	20h	10h	5h	3h
12	68	60	57	53

Specifications:	
Cells Per Unit	6
Voltage Per Unit	12V
Nominal Capacity	68.0Ah @20hour-rate to 1.75V per cell @25°C 57.0Ah @5hour-rate to 1.75V per cell @25°C
Weight	Approx. 17.5Kg ±2% (28.6lbs)
Terminal	R6.2
Recommended Maximum Charging Current	13.6A
Cycle Use Voltage	14.70V@ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -20°C~55°C Charge: 0°C~40°C Storage: -15°C~40°C
Normal Operating Temperature Range	25°C±5°C
Self Discharge	LIVEN Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	ABS


**Charging Profile**

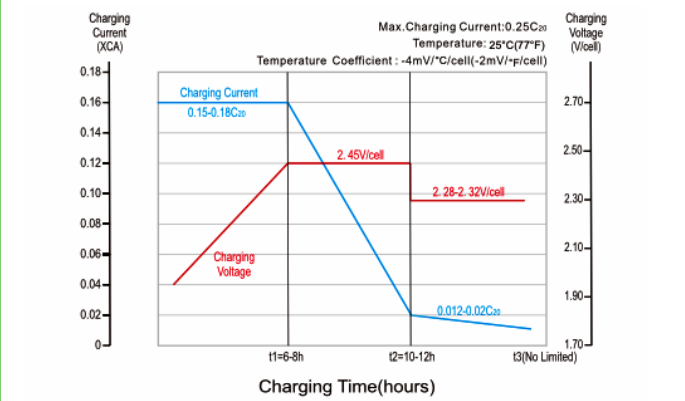


**Relationship of OCV and State Of Charge(25°C,77°F)**

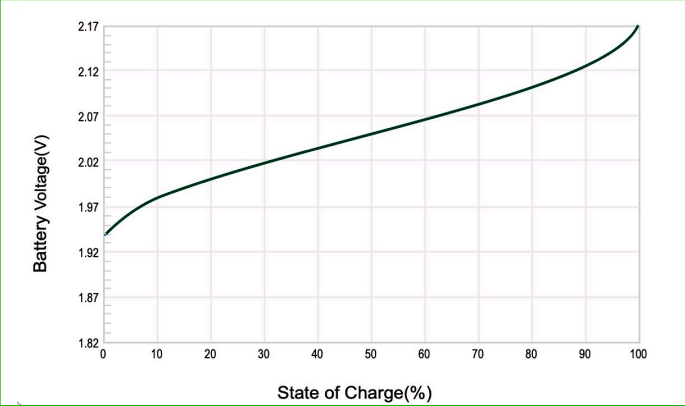

**Cycle Life in Relation to Depth Of Discharge**

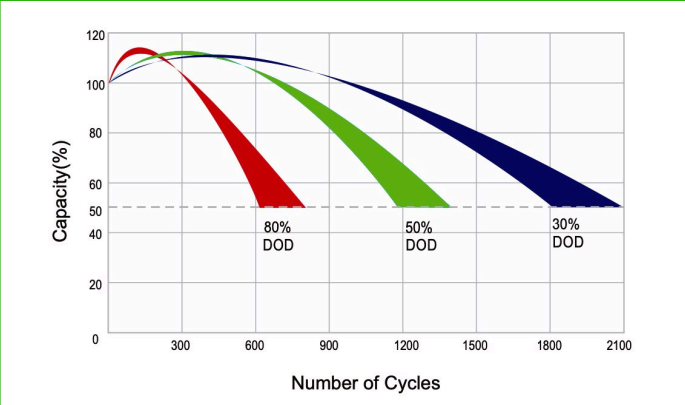

**Self-discharge Characteristic**

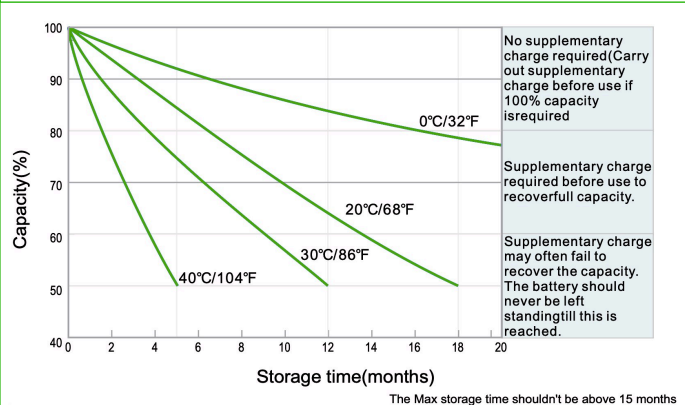

(Note) All above information shall be changed without prior notice. LIVEN Battery reserves the right to explain and update the latest information.